





Inflatable Pipe Plugs / Flow Stoppers : OLS

The Inflatable pipe plugs, (Dutch abbreviation OLS) are flow stoppers for temporary close off a range of pipe-diameters. The OLS flow stoppers/plugs are very suitable for use in sewage-systems with inspections, repairs, cleaning but also for pressure testing the drain system according to Euro Norm NEN-EN.

The OLS flow stoppers are build up with high quality aramide (Kevlar) reinforced layers of neoprene rubber. The plugs are multi-size flow stoppers, this means that with each flow stopper you can close off a range of pipe-diameters. The flow stoppers are easy to install, and as even more important easy and quick removed because of the relative small diameter and light weight.

Type: OLS		40/70	70/150	100/180
Article no.		3668007	7668008	7668009
Range	mm	40-70	70-150	100-180
	inch	1,5-2,7	2,7-6	4-7
Working pressure max.	Bar	1,5	1,5	3,0
	PSI	22	22	44
Dmin	mm	35	65	95
	inch	1,4	2,6	3,7
Length	mm	160	320	200
	inch	6,3	12,6	7,9
Weight	kg	0,35	0,55	1,25
	LBS	0,8	1,2	2,8

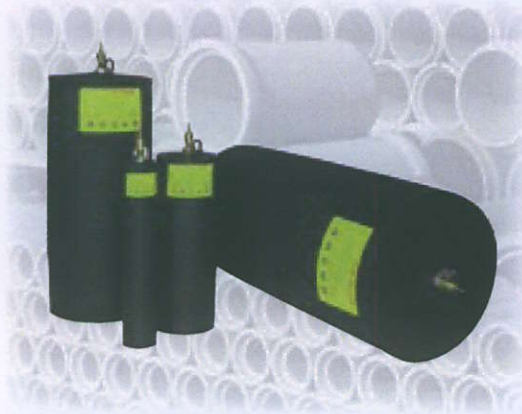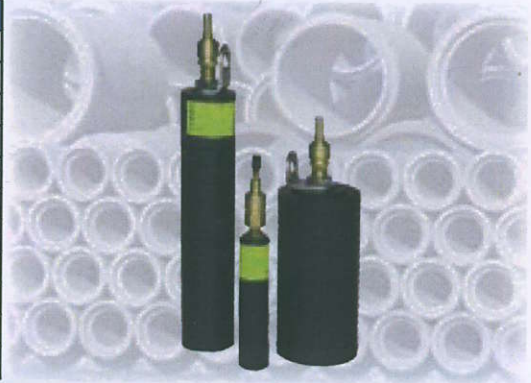

Type: OLS		100/200	200/400	300/600	500/1000
Article no.		7668001	7668002	7668003	7660154
Article no. Nitril		7660162	7660163	7660164	7660165
Range	mm	100-200	200-400	300-600	500-1000
	inch	4-8	8-16	12-24	20-40
Working pressure max.	Bar	3,0	3,0	3,0	3,0
	PSI	44	44	44	44
Dmin	mm	95	180	290	460
	inch	3,7	7,1	11,4	18,1
Length	mm	500	500	700	1000
	inch	19,7	19,7	27,6	39,4
Weight	kg	2	4	9	20
	LBS	4,4	8,8	19,8	44,1

Type: OLS		500/1200
Article no.		7660156
Article no. Nitril		7660167
Range	mm	500-1200
	inch	20-48
Working pressure max.	Bar	3,0
	PSI	44
Dmin	mm	440
	inch	17,3
Length	mm	1650
	inch	65,0
Weight	kg	52
	LBS	114,6

