


MEGAPLUG-ODS

The MEGAPLUG is a special inflatable plug developed for blocking the flow in big pipe diameters larger than 1000 mm. Due to the unique construction, a big range of large diameters pipelines can be closed off with one (1) plug which can be brought into a pipeline through the manhole.

Safe working conditions are of the utmost importance as the power of water can be unpredictably high in big diameter pipelines. Both the quality of the plug as well as the working method, are of the highest importance to create these safe working conditions. For all Megaplugs, a full test report and user manual is being delivered with the plug. The Megaplugs are capable to hold high backpressures because of the large contact surface with the wall and the high operating pressure in the plug.

The Megaplug is standard equipped with a flexible bypass diameter 4", this for testing with air or water and/or to conduct water. For reason of safety all Megaplugs are provided with a safety valve at the plug and a 1" hose with a ball valve, this for a quick and safe deflating after use. Suitable for use according to Euro Norm NEN-EN 1610.

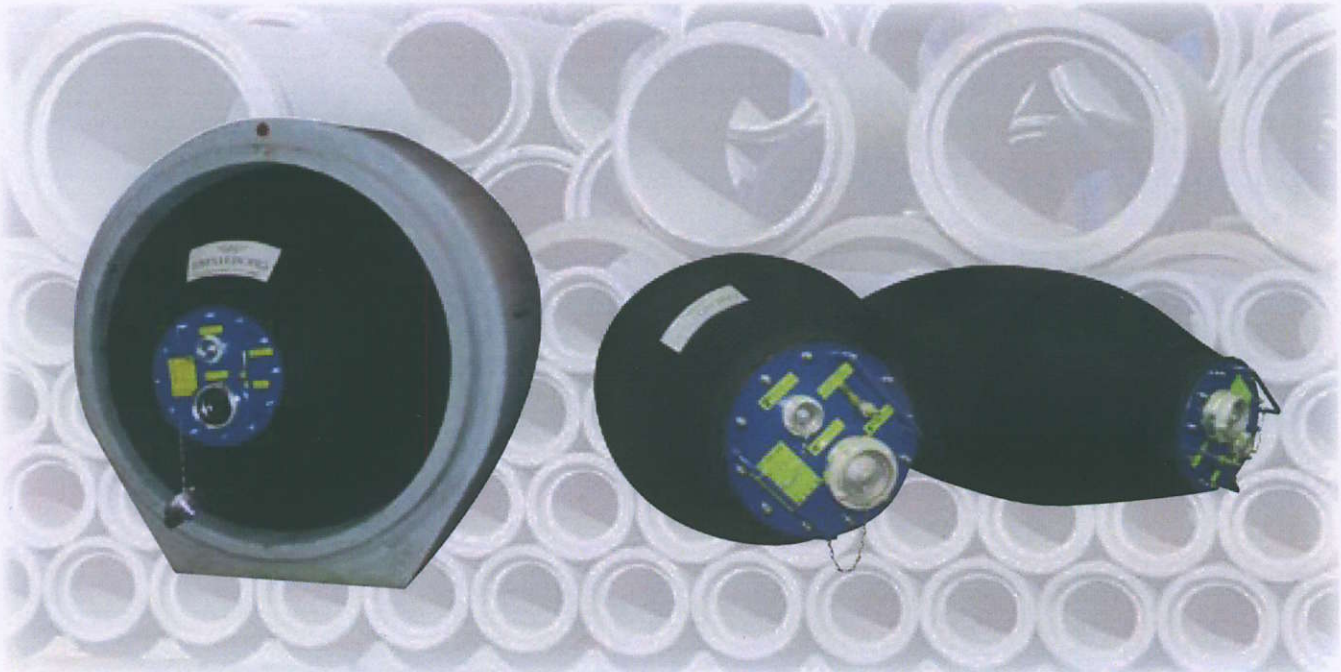

Type: ODS Megaplug		1400	1600	2000	2400
Article No.		7660159	7660158	7660161	***
Range	mm	500-1400	700-1600	800-2000	1200-2400
	inch	20-55	27-63	32-80	48-96
Working press. max.	Bar	1,5	1,0	1,0	1,0
	PSI	22	14	14	14
Dmin	mm	490	580	780	1000
	inch	19,3	22,8	30,7	39,4
Length	mm	2300	2700	3500	4300
	inch	90,6	106,3	137,8	169,3
Weight	kg	95	180	235	***
	LBS	209,4	396,8	518,1	***
Air connection		1"	1"	1"	***
Bypass		4" Storz-110A	4" Storz-110A	4" Storz-110A	***

Bypass diameter 6" and 8" on request.

*** On request